

GF Bracket



Accessory


The GF Bracket is ideal for clamping onto an I-Beam when it's not possible to loop around with a catenary cable, or when the size of the beam is too great.

FEATURES / BENEFITS


- **Simple** – fitted easily and securely by hand, no on-site power required
- **Quick** – removes the need to loop around an I-Beam
- **Safe** – ideal for large beams that would create > 60° angles at the Lockable Plus
- **Aesthetic** – provides a robust and well-engineered visual impact
- **Versatile** – available to suit I-Beam flange thicknesses from 6 mm to 30 mm



INSTALLATION

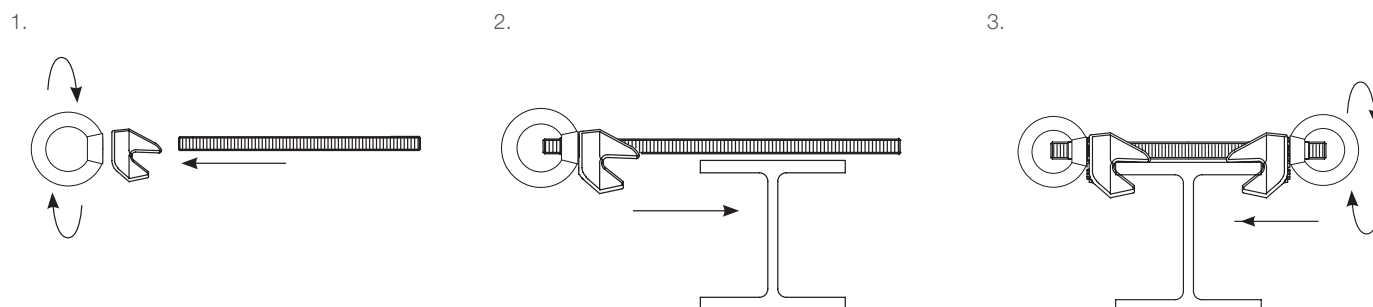

SPECIFICATION

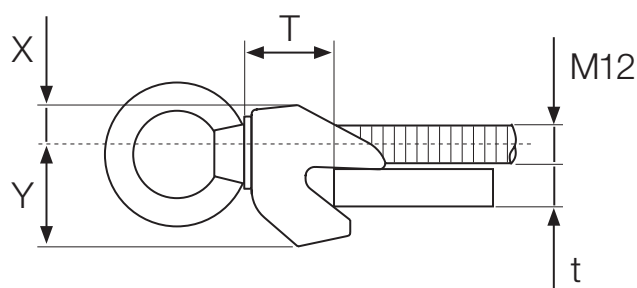

Product Code	T Flange Thickness (mm)	X (mm)	Y (mm)	Min/Max T (mm)
GF12-EYENUT	6 - 13	14	32	21 - 29
GF20-EYENUT-12	10 - 19	22	53	30 - 41
GF30-EYENUT-12	18 - 30	27	64	41 - 55

RELATED PRODUCTS



For more options on related products please contact us or visit www.gripple.com

SUBMITTAL INFORMATION

Safe Working Load:

340 kg @ 5:1 safety factor

Material:

SG Iron, Hot Dip Galvanised