

Spring clip



Accessory


The Spring clip is ideal for fixing to suspended services with 6 mm to 8 mm holes.

FEATURES / BENEFITS


- Ideal for fixing into services with limited space
- Available for 6 - 8 mm holes
- Designed for use on low bay lighting, busbar, strip lighting and luminaires
- Spring action prevents pull-out



INSTALLATION

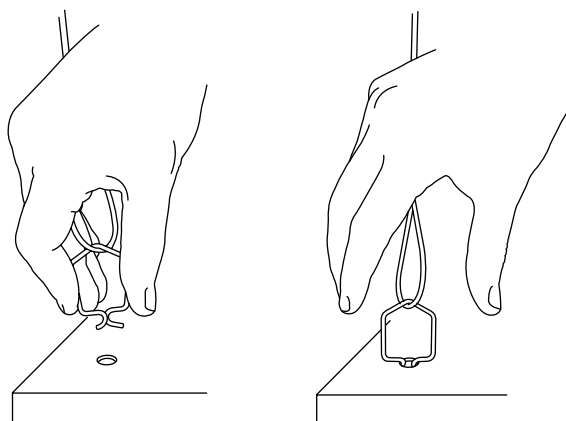

SPECIFICATION

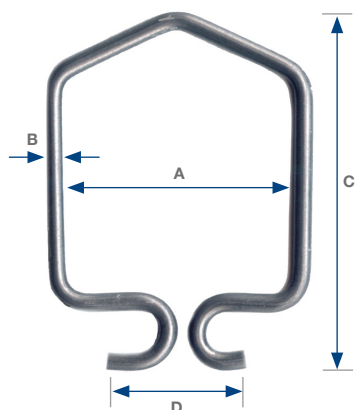

A (mm)	B (mm)	C (mm)	D (mm)
24	2	38	6 - 8

SUBMITTAL INFORMATION

Safe Working Load:

Up to 30 kg with a 3:1 safety factor

Material:

IMPORTANT RECOMMENDATIONS

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact GripplE Ltd. The responsibility for judgement of base material strength lies with the installer, and not with GripplE Ltd.
2. Not to be used in marine, coastal, swimming pool or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the user's responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. Whilst GripplE Ltd can give general guidance and advice, the nature of GripplE products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by GripplE Ltd.

PI-SPRINGCLIP-ENG-EU
Published 06/2019

www.gripplE.com

GripplE's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



GripplE Europe SARL | 1, rue du commerce | BP 37 | 67211 Oberrnai Cedex | France
Tel +33 (0)3 88 95 44 95 Fax +33 (0)3 88 95 08 78 Email info@gripplE.com