


Wire Anchor




Easily fixed into concrete for attaching No. 1 and No. 2 Grippler Hangars

FEATURES AND BENEFITS


- Suitable for non-cracked concrete, precast hollow concrete, and hard natural stone
- Made from high tensile stainless steel - suitable for most environments
- Sprung ends bite into concrete - preventing pull-out
- Typical safe working load 100 lbs with a 3:1 safety factor (C20/25 Concrete)
- Life expectancy in excess of 10 years in normal environments
- Wire anchor tool available - makes multiple installations quick and easy




1. Drill a hole, 8mm diameter to a minimum depth of 30mm.



2. Insert the wire anchor into the wire anchor tool, or hold with hand.




3. Hammer into the hole leaving approx. 15-20mm proud of concrete surface.

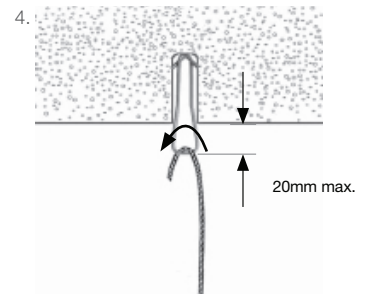

4. Attach Grippler Hanger to the wire anchor.

SPECIFICATION

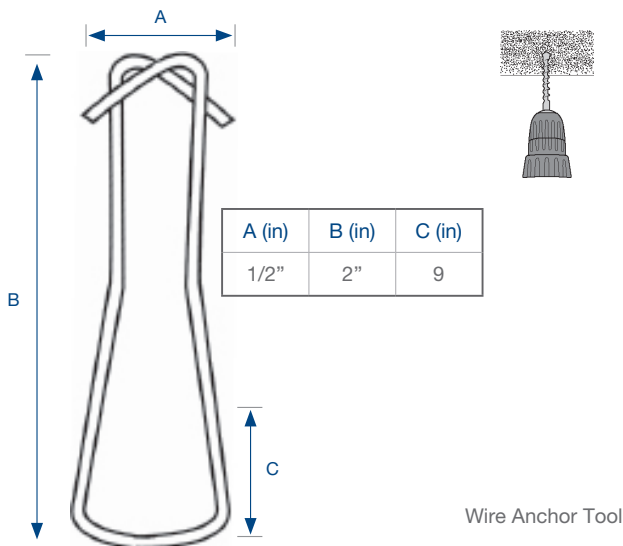

IMPORTANT RECOMMENDATIONS

1. Construction materials and conditions vary on different sites. If it is suspected that the base material has insufficient strength to achieve a suitable fixing, contact Grippler Inc. The responsibility for judgement of base material strength lies with the installer, and not with Grippler Inc.
2. Not to be used in marine, coastal, or corrosive environments.
3. The information and recommendations given herein are believed to be correct at time of writing. The data has been obtained from tests done under laboratory, or other controlled conditions and it is the users responsibility to use the data given in light of conditions on site, taking account of the intended use of the products concerned.
4. While Grippler Inc. can give general guidance and advice, the nature of Grippler products means that the ultimate responsibility for selecting the correct product for a particular application must lie with the customer.
5. All products must be used, handled and applied in accordance with current product instructions and manufacturers recommendations for use, published by Grippler Inc.

WARNING

There are many different types of concrete which have different anchoring properties. Prior to installation, installer must satisfy himself that concrete is suitable for use with this anchor.

PI-24-US-A
Digital SEP 2022

www.grippler.com

Grippler's policy is one of continuous development and innovation.
We therefore reserve the right to alter specifications, etc. without notice.



Grippler Inc | 1611 Emily Lane | Aurora, IL 60502 | USA
Tel +1 866 474 7753 Fax +1 800 654 0689 Email gripplerinc@grippler.com